



SAPPHIRE™

FLEXIBLE AND LIGHTWEIGHT, CUT LEVEL 3 GLOVE

The 15 gauge liner and thin palm-dipped PU coating combine to deliver a cut resistant barrier that is ideal for the superior precision handling of sharp components in dry conditions.

FEATURES

- › Level 3 cut resistance (EN388)
- › Enables precise handling of small components
- › Offers a combination of comfort, dexterity and cut resistance
- › Secure grip in light oily, greasy and dry conditions
- › Excellent resistance to abrasion and rips for extended durability
- › Elasticated wrist provides a secure fit
- › Sanitized® antimicrobial finish provides extra freshness
- › Breathable liner keeps hand cool and helps to reduce perspiration
- › Low linting liner



SUITABLE FOR


Typical Industries

- Construction
- Engineering
- Glass

Suitable Applications

- Assembly
- Bottling/Canning
- Packaging

CERTIFICATION

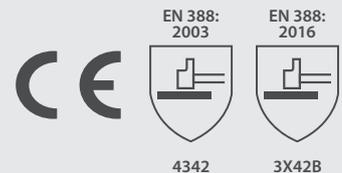

See overleaf for explanation





SAPPHIRE™

SUITABLE FOR

| | | |
|-------------|--------------------------|-------------------|
| MATERIALS | LINER: | HPPE |
| | COATING: | Polyurethane (PU) |
| COLOUR | Light Blue/Black | |
| LENGTH (mm) | 210-250 (size dependent) | |
| CUFF STYLE | Elasticated | |

ORDERING DETAILS

| SIZE | CODE | PACKAGING | VEND COMPATIBLE OPTION | |
|--------|--------|--------------------|------------------------|--|
| | | | CODE | PACKAGING |
| 6/XS | SKY660 | 10 pairs per bag | SKYV660 | 120 individually bagged pairs per case |
| 7/S | SKY661 | | SKYV661 | |
| 8/M | SKY662 | | SKYV662 | |
| 9/L | SKY663 | 120 pairs per case | SKYV663 | |
| 10/XL | SKY664 | | SKYV664 | |
| 11/XXL | SKY665 | | SKYV665 | |


RECOMMENDATIONS FOR USE

- It is the responsibility of the end user and not the manufacturer to determine glove suitability for the intended use.
- These gloves resist cut but are not cut proof. Do not subject to high speed or serrated blades. Do not use near moving machines if there is a risk of entanglement.
- Storage: Gloves should be ideally stored in cool, dry conditions in original packaging and away from direct sunlight.
- Cleaning/Maintenance: Both new and used gloves should be thoroughly inspected before being worn to ensure no damage is present. Gloves should not be left in contaminated condition if reuse is intended in which case gloves should be cleaned as far as possible.
- If appropriate, decontamination may take place under lukewarm water using laundry soap and detergent.
- Don't use chlorine bleaches.


CERTIFICATION LEGENDS



MECHANICAL HAZARDS
EN 388: 2003

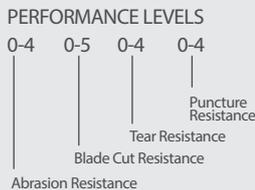

MECHANICAL HAZARDS
EN 388: 2016

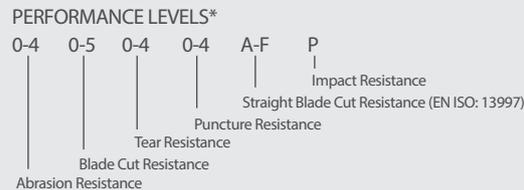

* If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

ABOUT GLOBUS

World leader in protecting hands, Globus serves organisations with bespoke hand protection solutions built from a professional range of high performance protective gloves.

Globus is proud to offer bespoke solutions that deliver robust commercial benefits not just safety improvements. We have an enviable track record in helping to reduce hand accident rates whilst delivering improved comfort and productivity as well as waste and cost reductions.

Globus applies its expertise across a spectrum of industries, meeting and exceeding a diverse range of hand protection requirements; from the rigorous demands of the petrochemical and construction industries to the complexities of clean room and aerospace manufacturing.

Find out why leading companies rely on a solution from Globus to help implement a comprehensive hand protection policy. Contact us today.

EUROPE

www.globus.co.uk

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus (Shetland) Ltd, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

© 2019 Globus (Shetland) Ltd | SKY-DATA-SAPPHIRE-0119_1