

IMPACT PROTECTION WITH CUT RESISTANCE AND A REINFORCED THUMB CROTCH

A flexible and highly visible glove with TPR impact protection zones and a nitrile foam sandy coating. Provides level C (ISO 13997) cut resistance as part of the EN 388:2016 standard.

FEATURES

- › HPPE, glass fibre and nylon liner provides level C cut resistance (EN 388:2016)
- › Flexible and soft 13gg liner provides excellent comfort
- › Excellent grip with a nitrile foam sandy coating on the palm
- › Hi-viz yellow liner for efficient hand signalling in poorly-lit environments
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand
- › TPR zones are sewn to the liner for increased resistance
- › Reinforced thumb crotch for enhanced durability
- › Breathable back of hand to reduce perspiration
- › Wrist well protected



SUITABLE FOR

Typical Industries

- Construction
- Heavy Engineering
- Mining
- Oil and Gas

Applications

- Demolition
- Drilling
- Extraction

CERTIFICATION



See overleaf for explanation



PRODUCT INFORMATION

MATERIALS	LINER:	HPPE, glass fibre and nylon
	COATING:	Nitrile foam sandy finish
COLOUR	Yellow/Red	
LENGTH (mm)	250 (size dependant)	
CUFF STYLE	Elasticated, knitwrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKY842	10 pairs per bag 60 pairs per case
9/L	SKY843	
10/XL	SKY844	
11/XXL	SKY845	
12/XXXL	SKY846	

RECOMMENDATIONS FOR USE


- It is the responsibility of the end user and not the manufacturer to determine glove suitability for the intended use.
- Storage: Ideally stored in dry conditions between 10°C and 30°C in the original packaging and sheltered from direct light. Do not exceed 40°C.
- Cleaning/Maintenance: Both new and used gloves should be thoroughly inspected before being worn to ensure no damage is present. If any damage is found on the gloves they should be disposed of. Gloves should not be left in contaminated condition if reuse is intended in which case gloves should be cleaned as far as possible. To clean, wipe with a damp cloth.
- Note: The performance characteristics of worn gloves may differ from the results shown.
- CAUTION! Avoid using near moving machinery due to entanglement hazard.
- Not recommended for use with liquid chemicals.

CERTIFICATION LEGENDS



MECHANICAL HAZARDS
EN 388: 2016

PERFORMANCE LEVELS*

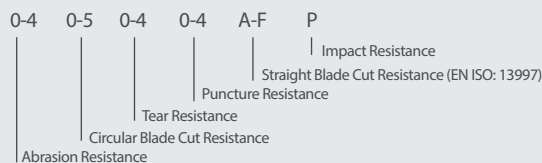

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

ABOUT GLOBUS

World leader in protecting hands, Globus serves organisations with bespoke hand protection solutions built from a professional range of high performance protective gloves.

Globus is proud to offer bespoke solutions that deliver robust commercial benefits not just safety improvements. We have an enviable track record in helping to reduce hand accident rates whilst delivering improved comfort and productivity as well as waste and cost reductions.

Globus applies its expertise across a spectrum of industries, meeting and exceeding a diverse range of hand protection requirements; from the rigorous demands of the petrochemical and construction industries to the complexities of clean room and aerospace manufacturing.

Find out why leading companies rely on a solution from Globus to help implement a comprehensive hand protection policy. Contact us today.

EUROPE

www.globus.co.uk

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

