

LIGHTWEIGHT PALM-COATED LATEX GLOVE WITH CUT PROTECTION

Lightweight with a high level of cut resistance and thermal resistance to 100°C for short contact. Great grip in wet and dry handling conditions.

FEATURES

- › Supple and lightweight (13gg) para-aramid, mixed fibre liner provides level D cut resistance (EN 388:2016)
- › Very good durability and resistance to contact heat up to 100°C
- › Blended with Spandex for comfort, ergonomic fit and dexterity
- › Crinkle latex palm coating finish offers optimum wet and dry grip
- › Sanitized® antimicrobial finish provides extra freshness
- › Wrist well protected



SUITABLE FOR


Typical Industries

- Aerospace
- Automotive
- Construction
- Glass
- Steel and Metals

Applications

- Glass Handling
- Metal Fabrication
- Metallurgy
- Paper Manufacturing
- Plastics Manufacturing

CERTIFICATION



See overleaf for explanation



PRODUCT INFORMATION

MATERIALS	LINER:	Para-aramid, mixed fibres
	COATING:	Crinkle Latex
COLOUR	Yellow/Black	
LENGTH (mm)	220-270 (size dependent)	
CUFF STYLE	Knitwrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY1011	10 pairs per bag 120 pairs per case
8/M	SKY1012	
9/L	SKY1013	
10/XL	SKY1014	
11/XXL	SKY1015	

RECOMMENDATIONS FOR USE


- It is the responsibility of the end user and not the manufacturer to determine glove suitability for the intended use.
- Storage: Ideally stored in dry conditions between 10°C and 30°C in the original packaging and sheltered from direct light. Do not exceed 40°C.
- Cleaning/Maintenance: Both new and used gloves should be thoroughly inspected before being worn to ensure no damage is present. If any damage is found on the gloves they should be disposed of. Gloves should not be left in contaminated condition if reuse is intended in which case gloves should be cleaned as far as possible. To clean, wipe with a damp cloth.
- Note: The performance characteristics of worn gloves may differ from the results shown overleaf.
- CAUTION! Avoid using near moving machinery due to entanglement hazard.
- Not recommended for use with liquid chemicals.
- The gloves must not come in to contact with a naked flame.

CERTIFICATION LEGENDS



MECHANICAL HAZARDS
EN 388: 2016


PERFORMANCE LEVELS*

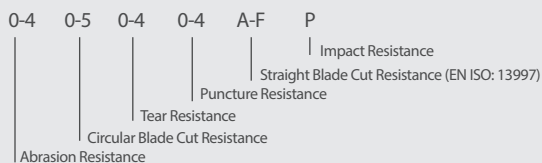

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407: 2004
PERFORMANCE LEVELS*

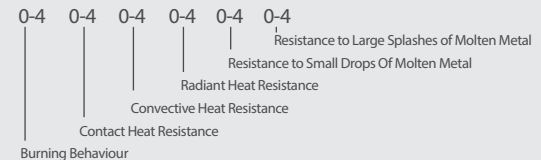

ABOUT GLOBUS

World leader in protecting hands, Globus serves organisations with bespoke hand protection solutions built from a professional range of high performance protective gloves.

Globus is proud to offer bespoke solutions that deliver robust commercial benefits not just safety improvements. We have an enviable track record in helping to reduce hand accident rates whilst delivering improved comfort and productivity as well as waste and cost reductions.

Globus applies its expertise across a spectrum of industries, meeting and exceeding a diverse range of hand protection requirements; from the rigorous demands of the petrochemical and construction industries to the complexities of clean room and aerospace manufacturing.

Find out why leading companies rely on a solution from Globus to help implement a comprehensive hand protection policy. Contact us today.

EUROPE

www.globus.co.uk

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Trafford Park, Manchester, M17 1NY, UNITED KINGDOM
Globus EMEA FZE, UA03, 831st Street, Jebel Ali, Dubai, UNITED ARAB EMIRATES

© 2018 Globus (Shetland) Ltd | SKYTEC-DATA-TORIN-0218_1